



Part Number : [1200110013](#)


Product Description : Micro-Change (M12) Receptacle, 4 Poles, M12x1 Threads, Female (Straight) to Leads, 0.30m (11.81") Length, Front Panel Mount

Series Number : 120011

Status : Active

Product Category : Circular Industrial Connectors

Engineering Number : 8R4E30E03C3003

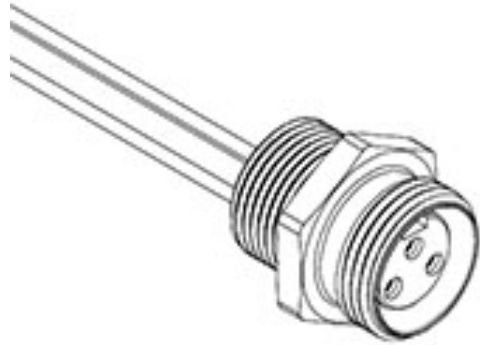

Documents & Resources

Drawings

[1200110013_sd.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead; Triphenyl-phosphate per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant with Exemption 6(a); 6(a)-I; 6(c) per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Circular Industrial Connectors
Series	120011
Description	Micro-Change (M12) Receptacle, 4 Poles, M12x1 Threads, Female (Straight) to Leads, 0.30m (11.81") Length, Front Panel Mount
IP Rating	IP67
NEMA Rating	NEMA 6
Product Name	Micro-Change (M12)
Type	Single Ended (pigtail)
UPC	883906174941

Electrical

Current - Maximum per Contact	4.0A
Voltage - Maximum	250V AC/DC

Physical

Coupling Type	Internal Thread
Gender	Female
Keyway	Single
Length	0.30m
Material - Component	Nickel-plated Brass
Mounting Thread Size	M14 x 1.0
Net Weight	25.960/g
Orientation	Straight
Panel Mount	Front
Poles	4
Temperature Range - Operating	-20° to +80°C
Wire/Cable Type	Leads, UL 1061

Wire Size (AWG)	22
-----------------	----

This document was generated on Mar 27, 2025