



Part Number : [1200310015](#)


Product Description : Nano-Change (M8) Receptacle, 3 Poles, A-Coded, M8 x 0.5 Mounting Threads, Female (Straight) to 22 AWG Leads, 0.30m (11.81") Length

Series Number : 120031

Status : Active

Product Category : Circular Industrial Connectors

Engineering Number : 4R3F30E02C3003

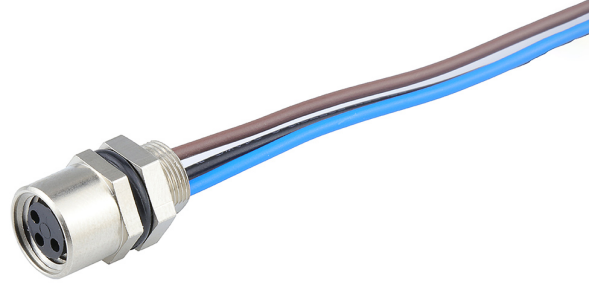


Documents & Resources

Drawings

[1200310015_sd.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead; Triphenyl-phosphate; Lead monoxide per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D

- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Circular Industrial Connectors
Series	120031
Description	Nano-Change (M8) Receptacle, 3 Poles, A-Coded, M8 x 0.5 Mounting Threads, Female (Straight) to 22 AWG Leads, 0.30m (11.81") Length
IP Rating	IP67
NEMA Rating	NEMA 6
Product Name	Nano-Change (M8)
Type	Single Ended (pigtail)
UPC	883906177799

Agency

UL	E152210
----	---------

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	60V AC / 75V DC

Physical

Coupling Type	Internal Thread
Gender	Female
Keyway	A-Coded
Length	0.30m
Material - Component	Nickel-plated Brass
Mounting Thread Size	M8 x 0.5
Net Weight	8.520/g
Orientation	Straight

Panel Mount	Front
Poles	3
Temperature Range - Operating	-25° to +85°C
Wire/Cable Type	UL 1569
Wire Size (AWG)	24

This document was generated on Mar 27, 2025