



**Part Number :** [1200651422](#)


**Product Description :** Micro-Push (M12) Single-Ended Cordset, 3 Poles, A-Coded, Female (90°)-to-Pigtail, 22 AWG, Unshielded PVC Cable, 2.0m (6.56') Length

**Series Number :** 120065

**Status :** Obsolete

**Product Category :** Circular Industrial Cordsets

**Engineering Number :** N03001A41M020G

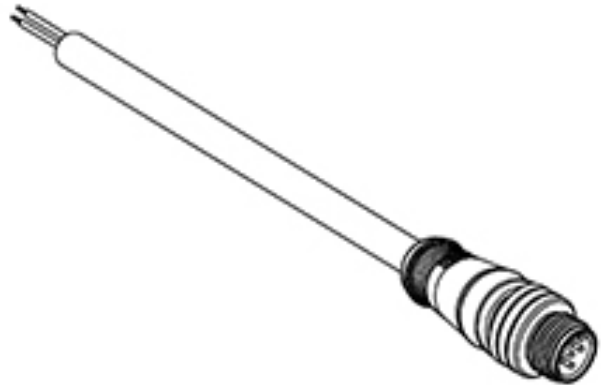

---

## Documents & Resources

---

### Product Environment Compliance

#### Compliance

China RoHS	Not Reviewed
EU ELV	Not Reviewed
Low-Halogen Status	Not Reviewed
REACH SVHC	Not Reviewed
EU RoHS	Not Reviewed

#### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Obsolete
Category	Circular Industrial Cordsets
Series	120065
Description	Micro-Push (M12) Single-Ended Cordset, 3 Poles, A-Coded, Female (90°)-to-Pigtail, 22 AWG, Unshielded PVC Cable, 2.0m (6.56') Length
IP Rating	IP65
Product Name	Micro-Push
Protocol	N/A
Type	Single Ended
UPC	78678851096

#### Agency

UL	E152210
----	---------

#### Electrical

Current - Maximum per Contact	4.0A
Voltage - Maximum	250V AC/DC

#### Physical

Cable Diameter	4.70mm (.185")
Cable Length	2.0m (6.56')
Color - Cable Jacket	Black
Connector End A	Micro-Push (M12)
Connector End B	Pigtail
Coupling Style	Push to Lock
Gender	Female-Pigtail
Keyway	A-Coded
LED Indicator	None
Material - Cable Jacket	PVC
Material - Connector Body	Nylon
Material - Contact	Copper Alloy
Material - Coupling Nut	N/A
Material - Plating Mating	Gold
Orientation	90° to Pigtail

Poles	3
Temperature Range - Operating	-25° to +105°C
Wire/Cable Type	Unshielded PVC
Wire Size (AWG)	22

---

This document was generated on Mar 27, 2025