



Part Number : [1200669639](#)


Product Description : Micro-Change (M12) Double-Ended Cordset with Knurled Hexnut, 4 Poles, Male (90°) to Female (Straight), 22 AWG, Yellow TPU WSOR Cable, Yellow Overmold, 5.0m (16.40') Length

Series Number : 120066

Status : Active

Product Category : Circular Industrial Cordsets

Engineering Number : 884032B55M050Y

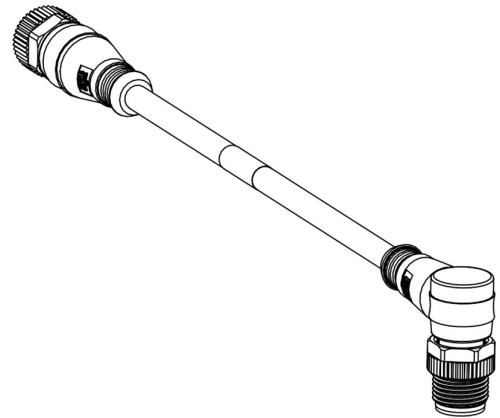

Documents & Resources

Drawings

[1200669639_sd.pdf](#)

Product Environment Compliance

Compliance

| | |
|--------------------|--|
| GADSL/IMDS | Not Relevant |
| China RoHS | Not Relevant |
| EU ELV | Compliant with Exemption 3 per 2000/53/EC |
| Low-Halogen Status | Not Relevant |
| REACH SVHC | Contains Lead per D(2024)6225-DC (07 Nov 2024) |
| EU RoHS | Compliant with Exemption 6(c) per EU 2015/863 |

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

| | |
|--------------|---|
| Status | Active |
| Category | Circular Industrial Cordsets |
| Series | 120066 |
| Description | Micro-Change (M12) Double-Ended Cordset with Knurled Hexnut, 4 Poles, Male (90°) to Female (Straight), 22 AWG, Yellow TPU WSOR Cable, Yellow Overmold, 5.0m (16.40') Length |
| IP Rating | IP67 |
| Product Name | Micro-Change (M12) |
| Type | Double Ended |
| UPC | 193264202799 |

Agency

| | |
|----|---------|
| UL | E152210 |
|----|---------|

Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 4.0A |
| Voltage - Maximum | 60V |

Physical

| | |
|----------------------|--------------------|
| Cable Diameter | 5.10mm (.201") |
| Cable Length | 5.0m (16.40') |
| Color - Cable Jacket | Yellow |
| Connector End A | Micro-Change (M12) |
| Connector End B | Micro-Change (M12) |
| Coupling Style | Threaded |
| Gender | Female-Male |
| Keyway | Single |
| LED Indicator | None |

| | |
|-------------------------------|---------------------|
| Material - Cable Jacket | TPU |
| Material - Connector Body | TPU |
| Material - Contact | Brass |
| Material - Coupling Nut | Nickel-plated Brass |
| Material - O-Ring | FPM |
| Material - Plating Mating | Gold |
| Net Weight | 187.000/g |
| Orientation | 90° to Straight |
| Poles | 4 |
| Temperature Range - Operating | -25° to +80°C |
| Wire/Cable Type | UL 21215 |
| Wire Size (AWG) | 22 |

This document was generated on Mar 27, 2025