



Part Number : [1201080215](#)


Product Description : Micro-Change(M12) Double-Ended Cordset, 4 Poles, D-Coded, Male (Straight) to Male Push/Pull RJ-45, 22 AWG, Shielded PUR Cable, 0.50m (1.64') Length

Series Number : 120108

Status : Active

Product Category : Circular Industrial Cordsets

Engineering Number : E17A06011M005

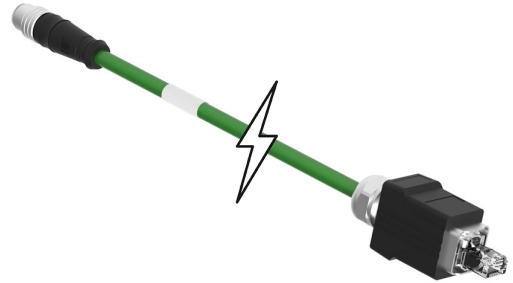

Documents & Resources

Drawings

[1201080215_sd.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	Not Reviewed per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Not Reviewed per D(2024)7663-DC (21 Jan 2025)
EU RoHS	Not Reviewed per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

Part Details

General

Status	Active
Category	Circular Industrial Cordsets
Series	120108
Description	Micro-Change(M12) Double-Ended Cordset, 4 Poles, D-Coded, Male (Straight) to Male Push/Pull RJ-45, 22 AWG, Shielded PUR Cable, 0.50m (1.64') Length
IP Rating	IP67
Performance Category	5e
Product Name	Micro-Change (M12)
Type	Double Ended
UPC	78172536351

Agency

UL	E200650
----	---------

Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	30V

Physical

Cable Diameter	6.70mm (.264")
Cable Length	0.50m (1.64')
Color - Cable Jacket	Green
Connector End A	Micro-Change (M12)
Connector End B	RJ-45 (standard)
Coupling Style	Threaded
Gender	Male-Male
Keyway	D-Coded
LED Indicator	None

Material - Cable Jacket	PUR
Material - Connector Body	PUR
Material - Contact	Copper Alloy
Material - Coupling Nut	Nickel-plated Brass
Material - Plating Mating	Gold
Orientation	Straight to Straight
Poles	4
Temperature Range - Operating	-20° to +60°C
Wire/Cable Type	Shielded PUR
Wire Size (AWG)	22

This document was generated on Mar 27, 2025