



Part Number : [1201080443](#)


Product Description : Double-Ended RJ-45 Cordset, 4 Poles, Male (Straight) to Male (Straight), 24 AWG, Blue Unshielded TPE Cable, 55.0m (180.45') Length, 6.99mm (.275") Diameter

Series Number : 120108

Status : Active

Product Category : Circular Industrial Cordsets

Engineering Number : E66A06006M550

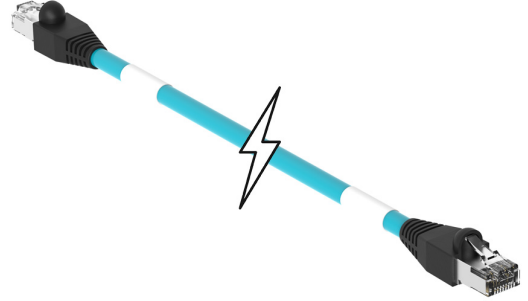

Documents & Resources

Drawings

[1201080443_sd.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	Not Relevant
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Not Relevant
REACH SVHC	Contains TBBA; bis(2-ethylhexyl) tetrabromophthalate covering any of the individual isomers and/or combinations thereof; Dodecachloropentacyclo[12.2.1.16, 9.02,13.05,10]octadeca-7,15-diene ("Dechlorane Plus" TM) per D(2024)7663-DC (21 Jan 2025)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Circular Industrial Cordsets
Series	120108
Description	Double-Ended RJ-45 Cordset, 4 Poles, Male (Straight) to Male (Straight), 24 AWG, Blue Unshielded TPE Cable, 55.0m (180.45') Length, 6.99mm (.275") Diameter
IP Rating	IP20
Performance Category	5e
Product Name	Industrial Ethernet
Protocol	EtherNet
Type	Double Ended
UPC	78172543754

Agency

UL	E361772
----	---------

Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	30V AC / 60V DC

Physical

Cable Diameter	6.99mm (.275")
Cable Length	55.0m (180.45')
Color - Cable Jacket	Blue
Connector End A	RJ-45 (standard)
Connector End B	RJ-45 (standard)

Coupling Style	N/A
Gender	Male-Male
Keyway	N/A
LED Indicator	None
Material - Cable Jacket	TPE
Material - Connector Body	Polycarbonate
Material - Contact	Phosphor Bronze
Material - Coupling Nut	N/A
Material - Plating Mating	Gold
Net Weight	62541.000/g
Orientation	Straight to Straight
Poles	4
Temperature Range - Operating	-20° to +75°C
Wire/Cable Type	Unshielded TPE
Wire Size (AWG)	24