



**Part Number :** [1201088795](#)


**Product Description :** Micro-Change (M12) to Standard RJ-45 Double-Ended Cordset, 4 Poles, D-Coded, Female (Straight) to Male RJ-45 (Straight), 22 AWG, Green Shielded TPU Cat5e Cable, 15.0m (49.21') Length

**Series Number :** 120108

**Status :** Active

**Product Category :** Circular Industrial Cordsets

**Engineering Number :** ERWPAU7012M150

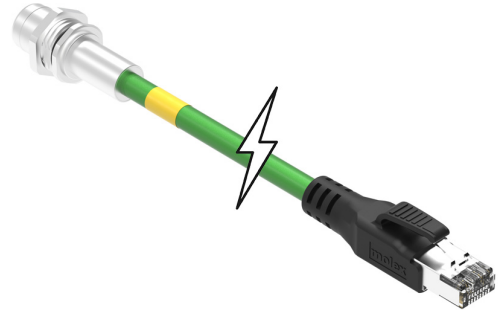

---

## Documents & Resources

### Drawings

[1201088795\\_sd.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	Not Relevant
EU ELV	Compliant with Exemption 3 per 2000/53/EC
Low-Halogen Status	Not Relevant
REACH SVHC	Contains Lead per D(2020)9139-DC (19 Jan 2021)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Circular Industrial Cordsets
Series	120108
Description	Micro-Change (M12) to Standard RJ-45 Double-Ended Cordset, 4 Poles, D-Coded, Female (Straight) to Male RJ-45 (Straight), 22 AWG, Green Shielded TPU Cat5e Cable, 15.0m (49.21') Length
IP Rating	IP20, IP67 (M12 only)
Performance Category	5e
Product Name	Industrial Ethernet, Micro-Change (M12), RJ45
Protocol	EtherNet
Type	Double Ended
UPC	193264182633

### Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	30V AC (RMS) / 42V DC

### Physical

Cable Diameter	6.80mm (.268")
Cable Length	15.0m (49.21')
Color - Cable Jacket	Green
Connector End A	Micro-Change (M12)
Connector End B	RJ-45 (standard)
Coupling Style	Push and Latch, Threaded
Gender	Female-Male
Keyway	D-Coded
LED Indicator	None

Material - Cable Jacket	TPU
Material - Connector Body	TPU
Material - Contact	Bronze
Material - Coupling Nut	Nickel-plated Brass
Material - O-Ring	FPM   Nitrile Rubber
Material - Plating Mating	Gold
Net Weight	154.000/g
Orientation	Straight to Straight
Poles	4
Temperature Range - Operating	-40° to +80°C
Wire/Cable Type	Shielded TPU
Wire Size (AWG)	22

---

This document was generated on Mar 27, 2025