



**Part Number :** [1203410970](#)


**Product Description :** Standard RJ-45 CAT6A Double-Ended Cordset, 8 Poles, Male (Straight) to Male (Straight), 26 AWG, Green Shielded PUR Cable, 8.0m (26.25') Length, with ID Tag

**Series Number :** 120341

**Status :** Active

**Product Category :** Circular Industrial Cordsets

**Engineering Number :** E66E06020M080H

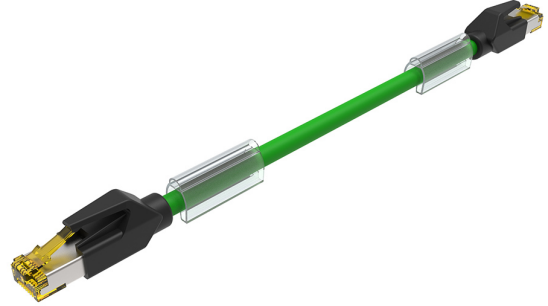

---

## Documents & Resources

### Drawings

[1203410970\\_sd.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	Not Relevant
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Not Relevant
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

## Part Details

### General

Status	Active
Category	Circular Industrial Cordsets
Series	120341
Description	Standard RJ-45 CAT6A Double-Ended Cordset, 8 Poles, Male (Straight) to Male (Straight), 26 AWG, Green Shielded PUR Cable, 8.0m (26.25') Length, with ID Tag
IP Rating	IP20
Performance Category	6A
Product Name	Industrial Ethernet,RJ45
Type	Double Ended
UPC	195842278493

### Agency

UL	E361772
----	---------

### Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	30V AC (RMS) / 42V DC

### Physical

Cable Diameter	6.90mm (.272")
Cable Length	8.0m (26.25')
Color - Cable Jacket	Green
Connector End A	RJ-45 (standard)
Connector End B	RJ-45 (standard)
Coupling Style	Push and Latch
Gender	Male-Male
Keyway	N/A
LED Indicator	None

Material - Cable Jacket	PUR
Material - Connector Body	TPU
Material - Contact	Phosphor Bronze
Material - Coupling Nut	N/A
Material - Plating Mating	Gold
Net Weight	403.371/g
Orientation	Straight to Straight
Poles	8
Temperature Range - Operating	-20° to +80°C
Wire/Cable Type	Shielded PUR
Wire Size (AWG)	26

---

This document was generated on Mar 27, 2025