



**Part Number :** [1300150098](#)


**Product Description :** Mini-Change C-Size Receptacle, 19 Poles, 1-1/8" - 16 UN-2A Threads, Female (Straight) to Leads, 0.30m (11.81") Length

**Series Number :** 130015

**Status :** Active

**Product Category :** Circular Industrial Connectors

**Engineering Number :** 3R3N30E80C300

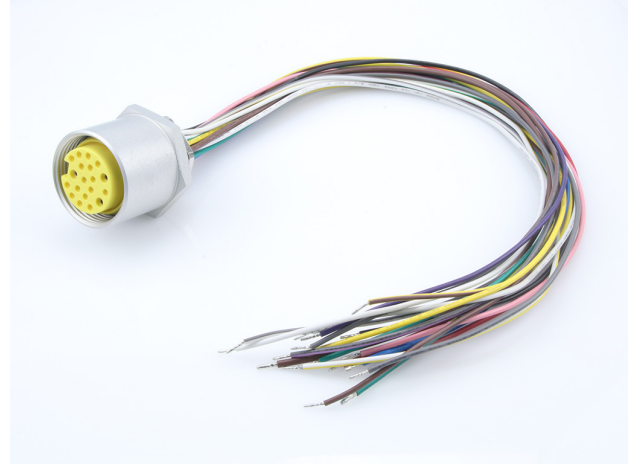

---

## Documents & Resources


### Drawings

[1300150098\\_sd.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Reviewed per D(2024)7663-DC (21 Jan 2025)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Circular Industrial Connectors
Series	130015
Description	Mini-Change C-Size Receptacle, 19 Poles, 1-1/8" - 16 UN-2A Threads, Female (Straight) to Leads, 0.30m (11.81") Length
Comments	C-Size (1-1/8" - 16 UN-2A)
IP Rating	IP67
Product Name	Mini-Change
Type	Single Ended (pigtail)
UPC	78678841463

### Electrical

Current - Maximum per Contact	2.0A
Voltage - Maximum	300V AC/DC

### Physical

Coupling Type	Internal Thread
Gender	Female
Keyway	Single
Length	0.30m
Material - Component	Gray Anodized Aluminum
Mounting Thread Size	PG16
Net Weight	90.200/g
Orientation	Straight
Panel Mount	Front
Poles	19
Temperature Range - Operating	-20° to +80°C
Wire/Cable Type	UL 1569

Wire Size (AWG)	18, 22
-----------------	--------

---

This document was generated on Mar 27, 2025