



Part Number : [1552200151](#)


Product Description : Flamar Control Cable, WSOR Jacket, Unshielded, 5 Circuits, 0.75mm² with Green-Yellow Ground / 19 AWG with Green-Yellow Ground, 7.50mm (.295") Diameter, 300.0m (984.25') Length, Black

Series Number : 307963

Status : Active

Product Category : Industrial Cable

Engineering Number : B39-5-3X100M

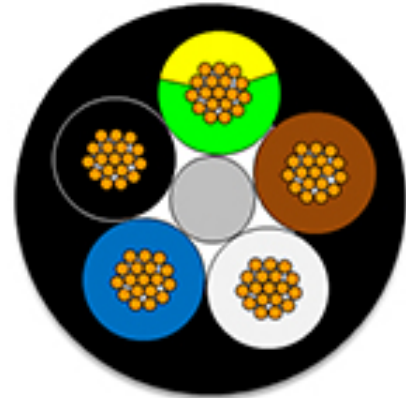

Documents & Resources

Specifications

[1552200001-P1E.pdf](#)

Product Environment Compliance

Compliance

| | |
|--------------------|--------------|
| China RoHS | Not Reviewed |
| EU ELV | Not Reviewed |
| Low-Halogen Status | Not Reviewed |
| REACH SVHC | Not Reviewed |
| EU RoHS | Not Reviewed |

[Multiple Part Product Compliance Statements](#)

- Eu RoHS
- REACH SVHC
- Low-Halogen

[Multiple Part Industry Compliance Documents](#)

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

[EU RoHS Certificate of Compliance](#)

Part Details

General

| | |
|-----------------|--|
| Status | Active |
| Category | Industrial Cable |
| Series | 307963 |
| Description | Flamar Control Cable, WSOR Jacket, Unshielded, 5 Circuits, 0.75mm ² with Green-Yellow Ground / 19 AWG with Green-Yellow Ground, 7.50mm (.295") Diameter, 300.0m (984.25') Length, Black |
| Comments | 3 reels of 100.0m each |
| Geographic Area | Global |
| Product Name | Flamar,Signal and Control |
| UPC | 889056459655 |

Electrical

| | |
|-------------------------------|---------------|
| Current - Maximum per Contact | Contact Molex |
| Voltage - Maximum | 600V |

Physical

| | |
|-------------------------------|--------------------|
| Bending Radius - Minimum | > 7.5xOD |
| Cable Length | 300.0m |
| Circuits (Loaded) | 5 |
| Color - Cable Jacket | Black |
| Insulation | TPE |
| Material - Outer Jacket | WSOR |
| Net Weight | 0.082/kg |
| Outer Jacket Diameter | 7.50mm |
| Packaging Type | Reel |
| Temperature Range - Operating | -25° to +80°C |
| Wire/Cable Type | UL AWM 21215 / CSA |
| Wire Size (AWG) | 19 |
| Wire Size mm ² | 0.75 |

Use with Part(s)

| Description | Part Number |
|--|---------------|
| mPm DIN Valve Connectors | <u>121201</u> |
| mPm DIN Valve Connectors | <u>121202</u> |
| mPm DIN Valve Connectors | <u>121205</u> |
| mPm DIN Valve Connectors | <u>121207</u> |
| mPm DIN Valve Connectors | <u>121208</u> |
| mPm DIN Valve Connectors | <u>121211</u> |
| Micro-Change (M12) Field Attachable Connectors | <u>120071</u> |
| Ultra-Lock (M12) Single Keyway Field Attachable Connectors | <u>120085</u> |
| GWconnect Heavy-Duty Connectors and Accessories | <u>93601</u> |