



Part Number : [1552410028](#)


Product Description : Flamar Sensor Cable, TPE Jacket, Braided Shielding Overall, 5 Circuits, 0.34mm² / 22 AWG, 6.40mm (.252") Diameter, 300.0m (984.25') Length, Gray

Series Number : 307963

Status : Active

Product Category : Industrial Cable

Engineering Number : 3X100M

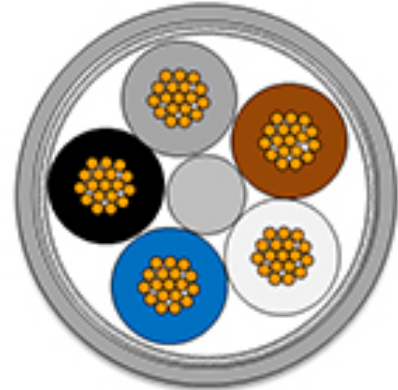

Documents & Resources

Specifications

[1552400001-P1E.pdf](#)

Product Environment Compliance

Compliance

China RoHS	Not Reviewed
EU ELV	Not Reviewed
Low-Halogen Status	Not Reviewed
REACH SVHC	Not Reviewed
EU RoHS	Not Reviewed

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Industrial Cable
Series	307963
Description	Flamar Sensor Cable, TPE Jacket, Braided Shielding Overall, 5 Circuits, 0.34mm ² / 22 AWG, 6.40mm (.252") Diameter, 300.0m (984.25') Length, Gray
Comments	3 reels of 100.0m each
Geographic Area	Global
Product Name	Flamar,Signal and Control
UPC	889056458948

Electrical

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	300V

Physical

Bending Radius - Minimum	> 10xOD
Cable Length	300.0m
Circuits (Loaded)	5
Color - Cable Jacket	Gray
Insulation	PVC
Material - Outer Jacket	TPE
Net Weight	0.010/g
Outer Jacket Diameter	6.40mm
Packaging Type	Reel
Temperature Range - Operating	-40° to +105°C
Wire/Cable Type	UL Listed PLTC
Wire Size (AWG)	22
Wire Size mm ²	0.34

Use with Part(s)

Description	Part Number
Micro-Change (M12) Field Attachable Connectors	<u>120071</u>
Ultra-Lock (M12) Single Keyway Field Attachable Connectors	<u>120085</u>
Nano-Change (M8) Field Attachable Connectors	<u>120091</u>

This document was generated on Mar 27, 2025