



Part Number : [1200060618](#)


Product Description : Micro-Change (M12) Single-Ended Cordset, 4 Poles, Female (90°) to Pigtail with PNP LED Sensors, 0.34mm<sup>2</sup> PUR/PVC Cable 2.0m (6.56') Length

Series Number : 120006

Status : Active

Product Category : Circular Industrial Cordsets

Engineering Number : 8040P1P03M020

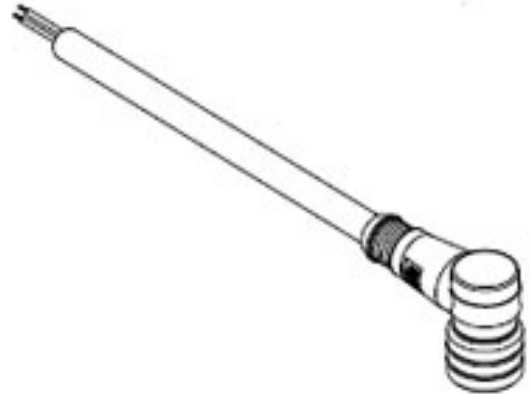

---

## Documents & Resources

### Drawings

[1200060618\\_sd.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead; TBBA; Triphenyl-phosphate per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Circular Industrial Cordsets
Series	120006
Description	Micro-Change (M12) Single-Ended Cordset, 4 Poles, Female (90°) to Pigtail with PNP LED Sensors, 0.34mm <sup>2</sup> PUR/PVC Cable 2.0m (6.56') Length
IP Rating	IP67
Product Name	Micro-Change (M12)
Protocol	N/A
Type	Single Ended
UPC	883906291761

### Electrical

Current - Maximum per Contact	4.0A
Voltage - Maximum	30V AC/DC

### Physical

Cable Diameter	5.30mm (.209")
Cable Length	2.0m (6.56')
Color - Cable Jacket	Black
Connector End A	Micro-Change (M12)
Connector End B	Pigtail
Coupling Style	Threaded
Gender	Female-Pigtail
Keyway	Single
LED Indicator	PNP Sensors
Material - Cable Jacket	PUR/PVC
Material - Connector Body	PUR

Material - Contact	Copper Alloy
Material - Coupling Nut	Nickel-plated Brass
Material - O-Ring	Fluoro-elastomer
Material - Plating Mating	Gold
Net Weight	91.180/g
Orientation	90° to Pigtail
Poles	4
Temperature Range - Operating	-30° to +90°C
Wire/Cable Type	EU Cable
Wire Size (AWG)	N/A

---

This document was generated on Mar 27, 2025