



**Part Number :** [1201080307](#)


**Product Description :** Micro-Change (M12) Double-Ended Cordset, 4 Poles, D-Coded, Male (Straight) to Male (Straight), 24 AWG, Orange TPE Cable, 15.0m (49.21' ) Length, 6.35mm (.250") Diameter

**Series Number :** 120108

**Status :** Active

**Product Category :** Circular Industrial Cordsets

**Engineering Number :** E11A06008M150

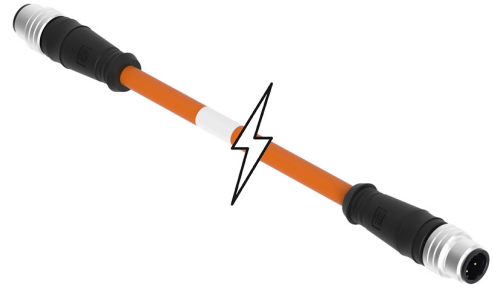

---

## Documents & Resources

### Drawings

[1201080307\\_sd.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Not Reviewed per D(2024)7663-DC (21 Jan 2025)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

## Part Details

### General

Status	Active
Category	Circular Industrial Cordsets
Series	120108
Description	Micro-Change (M12) Double-Ended Cordset, 4 Poles, D-Coded, Male (Straight) to Male (Straight), 24 AWG, Orange TPE Cable, 15.0m (49.21') Length, 6.35mm (.250") Diameter
IP Rating	IP67
Performance Category	5e
Product Name	Micro-Change (M12)
Protocol	EtherNet
Type	Double Ended
UPC	78172541098

### Agency

UL	E361772
----	---------

### Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	125V

### Physical

Cable Diameter	6.35mm (.250")
Cable Length	15.0m (49.21')
Color - Cable Jacket	Orange
Connector End A	Micro-Change (M12)
Connector End B	Micro-Change (M12)
Coupling Style	Threaded
Gender	Male-Male
Keyway	D-Coded

LED Indicator	None
Material - Cable Jacket	TPE
Material - Connector Body	PUR
Material - Contact	Copper Alloy
Material - Coupling Nut	Nickel-plated Brass
Material - Plating Mating	Gold
Net Weight	1754.000/g
Orientation	Straight to Straight
Poles	4
Temperature Range - Operating	-20° to +80°C
Wire/Cable Type	Unshielded TPE/AWM 20626
Wire Size (AWG)	24

---

This document was generated on Mar 27, 2025