



**Part Number :** [1201089121](#)


**Product Description :** Micro-Change (M12) Double-Ended Cordset, 8-Pole X-Coded Male (Straight) to 4-Pole D-Coded Male (Straight), 24 AWG, Teal TPE Cable, 5.0m (16.40') Length

**Series Number :** 120108

**Status :** Active

**Product Category :** Circular Industrial Cordsets

**Engineering Number :** E12A06004M050

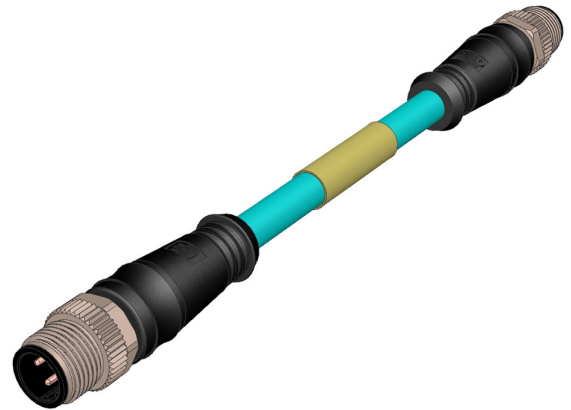

---

## Documents & Resources

### Drawings

[1201089121\\_sd.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	Not Relevant
EU ELV	Compliant with Exemption 3 per 2000/53/EC
Low-Halogen Status	Not Relevant
REACH SVHC	Contains Lead; 6,6'-Di-tert-butyl-2,2'-methylenedi-p-cresol per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D

- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Circular Industrial Cordsets
Series	120108
Description	Micro-Change (M12) Double-Ended Cordset, 8-Pole X-Coded Male (Straight) to 4-Pole D-Coded Male (Straight), 24 AWG, Teal TPE Cable, 5.0m (16.40') Length
IP Rating	IP67
Performance Category	5e
Product Name	Micro-Change (M12)
Type	Double Ended
UPC	196823082528

### Agency

UL	E361772
----	---------

### Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	48V

### Physical

Cable Diameter	6.10mm (.240")
Cable Length	5.0m (16.40')
Color - Cable Jacket	Teal
Connector End A	Micro-Change (M12)
Connector End B	Micro-Change (M12)
Coupling Style	Threaded
Gender	Male-Male

Keyway	D-Coded   X-Coded
LED Indicator	None
Material - Cable Jacket	TPE
Material - Connector Body	TPU
Material - Contact	Brass
Material - Coupling Nut	Nickel-plated Brass
Material - Plating Mating	Gold
Net Weight	301.600/g
Orientation	Straight to Straight
Poles	4, 8
Temperature Range - Operating	-25° to +85°C
Wire/Cable Type	Unshielded TPE/AWM 2463
Wire Size (AWG)	24